

If the pattern has a double line around it, the seam allowances are included.

Note: By default, seam allowances are NOT included (single line) and will need to be added when laying out and cutting details.

Seam Allowance: 1 cm on all seams; hem guidelines are printed on pattern.

Important! Please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need.

Don't forget to take into account pieces to be duplicated or cut on a fold. When sewing the garment, pay attention to notches. They must match up with corresponding pieces.

2002 Shawl with Ruffles and Lace Trim for Bridal Dress

Recommendations on fabric: sheer fatin.

You will also need: lace border of 2 cm width .

CUTTING:

The word, "beam" used on some patterns means "straight of grain". Some pieces will be cut on the fold, this is noted on the pattern piece. Mark all notches and other design features such as darts, pleats etc. from the pattern onto your fabric.


Seam allowances: 1 cm for all seams (excluding flounce patterns) .

Main fabric:

Fatin:

1. Stole with one-piece sleeves
2. Wide/narrow flounces of square

Lace border: sew to ready stole, then bead.

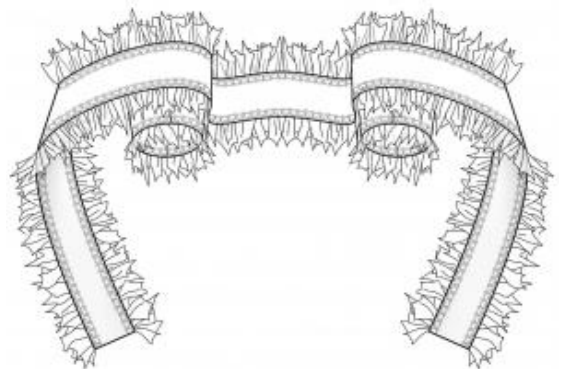

INSTRUCTIONS:

1. Cut wide and narrow square-shaped flounces along the cutting line. Place the narrow flounce on top of the wide one and stitch them together, attaching them to the edges of the stole (stitch the inner diameter of the flounces to the stole, leaving the ends loose – see picture). Stitch the flounces only along the long edges of the stole.
2. Cover the stitching lines with lace trim (approximately 6 meters of lace trim are needed).
3. Stitch flounces to the sleeve edges as well, then cover them with lace trim. Sew the sleeves along the inner seam up to the marked points.

Congratulations, your shawl is ready! :)