

If the pattern has a double line around it, the seam allowances are included.

**Note:** By default, seam allowances are NOT included (single line) and will need to be added when laying out and cutting details.

Seam Allowance: 1 cm on all seams; hem guidelines are printed on pattern.

**Important!** Please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need.

Don't forget to take into account pieces to be duplicated or cut on a fold. When sewing the garment, pay attention to notches. They must match up with corresponding pieces.

## 2008 Veil with Cuffs

Recommendations on fabric: sheer fatin.

You will also need: lace border of 4-5 cm width, satin.

### CUTTING:

The word, "beam" used on some patterns means "straight of grain". Some pieces will be cut on the fold, this is noted on the pattern piece. Mark all notches and other design features such as darts, pleats etc. from the pattern onto your fabric.

Seam allowances: 1 cm for all seams.

### Main fabric:


Fatin:

1. Stole – 1 piece

Satin:

1. Cuff – 2 pieces

Sew lace border on ready cuff, then bead by hand.

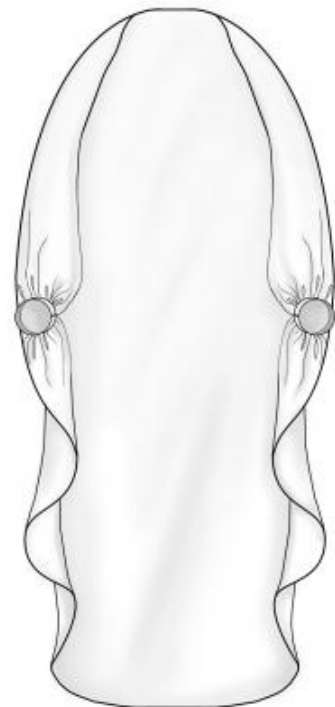



Model 2008

pattern from pppp.dk

## INSTRUCTIONS:

1. Slightly gather the tulle to match the width of the cuff.
2. Stitch the cuffs, sew on the lace trim, then add beading.

Congratulations, your veil is ready! :)