

If the pattern has a double line around it, the seam allowances are included.

**Note:** By default, seam allowances are NOT included (single line) and will need to be added when laying out and cutting details.

Seam Allowance: 1 cm on all seams; hem guidelines are printed on pattern.

**Important!** Please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need.

Don't forget to take into account pieces to be duplicated or cut on a fold. When sewing the garment, pay attention to notches. They must match up with corresponding pieces.

## 2037 Jersey Tunic with Long Sleeves

Recommendations on fabric: thin fleece, footer or natural/mixed thick knit fabric of small stretchiness.

You will also need: lining, knit fabric of high stretchiness.

### CUTTING:

The word, “beam” used on some patterns means “straight of grain”. Some pieces will be cut on the fold, this is noted on the pattern piece. Mark all notches and other design features such as darts, pleats etc. from the pattern onto your fabric.


Seam allowances: 1 cm for all seams.

### Main fabric:

1. Front – cut 1 on fold
2. Front side – cut 2
3. Back – cut 1 on fold
4. Sleeve – cut 2

### Knit fabric of high stretchiness:

1. Neckline facing – cut 1

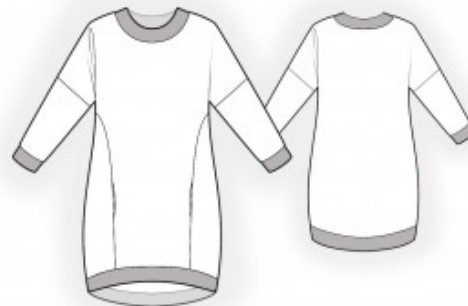

2. Hem facing – cut 2
3. Cuff – cut 2

Lining:

1. Pocket bag – cut 4

INSTRUCTIONS:

Advice: sew knit pieces with special elastic/zig-zag stitches. If you use an overlock, cut seam allowances to 0.6-0.8 cm width. Topstitch hem allowances with double needle to save elasticity.

1. Sew the pocket bags to the front and side front pieces. Serge the edges. Sew the side front to the front, attaching the pocket bags at the same time. Serge the seams and press them toward the center.
2. Sew the shoulder seams. Serge the seams and press them toward the back.
3. Sew the sleeves into the armholes. Serge and press the seams toward the sleeve. Sew the side seam and sleeve seam in one continuous stitch. Serge and press the seams toward the back.
4. Sew the neckline facing into a ring and press the seam open. Fold the facing in half lengthwise and press. Sew the facing to the neckline, slightly stretching it. Serge and press the seam toward the facing.
5. Sew the cuff into a ring and press the seam open. Fold the cuff in half lengthwise and press. Sew the cuff to the lower edge of the sleeve, slightly stretching it. Serge and press the seam toward the cuff.
6. Sew the hem facing into a ring and press the seam open. Fold the facing in half lengthwise and press. Sew the facing to the front and back hems, slightly stretching it. Serge and press the seam toward the facing.

Congratulations, your tunic is ready! :)