

If the pattern has a double line around it, the seam allowances are included.

Note: By default, seam allowances are NOT included (single line) and will need to be added when laying out and cutting details.

Seam Allowance: 1 cm on all seams; hem guidelines are printed on pattern.

Important! Please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need.

Don't forget to take into account pieces to be duplicated or cut on a fold. When sewing the garment, pay attention to notches. They must match up with corresponding pieces.


2439 Skirt with Asymmetrical Flounce

Recommendations on fabric: thick natural/mixed fabrics suitable for skirts.

You will also need: fusible interfacing; 1 button; dress zipper.

CUTTING:

The word, "beam" used on some patterns means "straight of grain". Some pieces will be cut on the fold, this is noted on the pattern piece. Mark all notches and other design features such as darts, pleats etc. from the pattern onto your fabric.

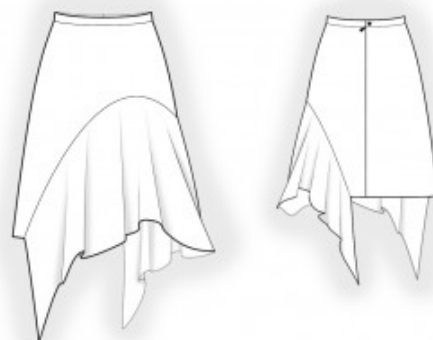

Seam allowances: all seams 1 cm. Seam allowance along hem – 2 cm, lower edges of inset – 2 cm.

Main fabric:

1. Front skirt – cut 1
2. Right back skirt – cut 1
3. Left back skirt – cut 1
4. Inset – cut 1
5. Belt – cut 1

Fusible interfacing:

1. Belt – cut 1

INSTRUCTIONS:

1. Apply fusible interfacing to the belt.
2. Serge the center back edges separately. Sew the center back seam from the zipper marking to the hem. Press the seam allowances open and insert the zipper.
3. Sew the side seams. Serge the seam allowances and press them toward the back.
4. Sew the inset to the skirt. Serge the seam allowances and press them toward the inset.
5. Sew the outer edge of the belt to the upper edge of the skirt. Sew the belt ends, trim the corners, and turn the belt right side out. Fold the inner edge of the belt under and stitch in the ditch. Press the belt.
6. Mark and make the buttonhole. Sew on the button.
7. Serge the hem of the skirt and the hem of the inset. Press them to the wrong side and topstitch.

Congratulations – your skirt are finished! :)