

If the pattern has a double line around it, the seam allowances are included.

**Note:** By default, seam allowances are NOT included (single line) and will need to be added when laying out and cutting details.

Seam Allowance: 1 cm on all seams; hem guidelines are printed on pattern.

**Important!** Please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need.


Don't forget to take into account pieces to be duplicated or cut on a fold. When sewing the garment, pay attention to notches. They must match up with corresponding pieces.

## 2489 T-Shirt with Asymmetrical Trim

Recommendations on fabric: natural/mixed knit fabric of medium stretchiness in contrasting colors.

### CUTTING:

The word, “beam” used on some patterns means “straight of grain”. Some pieces will be cut on the fold, this is noted on the pattern piece. Mark all notches and other design features such as darts, pleats etc. from the pattern onto your fabric.

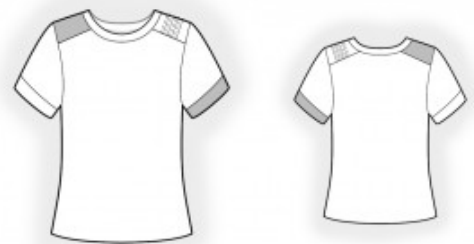

Seam allowances: all seams 1 cm. Seam allowance for hem of garment – 1.5 cm.

### Main fabric:

1. Back – cut 1 on fold
2. Front – cut 1 on fold
3. Neckline facing – cut 1
4. Sleeve – cut 2
5. Cuff right – cut 1
6. Yoke left – cut 1

### Main fabric 1:

1. Cuff left – cut 1
2. Yoke right – cut 1

## INSTRUCTIONS:

Advice: sew knit pieces with special elastic/zig-zag stitches. If you use an overlock, cut seam allowances to 0.6-0.8 cm width. Topstitch hem allowances with double needle to save elasticity.

1. Form and stitch the pleats on the left front. Press the pleat excess toward the armhole.
2. Sew the yokes to the front pieces. Serge the seam allowances and press them toward the yokes. Sew the yokes to the back pieces. Serge the seam allowances and press them toward the yokes.
3. Sew the side seams. Press the seam allowances toward the back and serge.
4. Sew the neckline band into a ring and press the seam allowances open. Fold the band in half lengthwise, wrong sides together, and press. Sew the neckline band to the neckline, stretching it slightly as you sew. Serge the seam allowances and press.
5. Sew the sleeve seams. Serge the seam allowances and press them. Set the sleeves into the armholes. Serge the seam allowances and press.
6. Sew the cuffs into rings and press the seam allowances open. Fold each cuff in half lengthwise, right side out, and press. Sew the cuffs to the lower edges of the sleeves. Serge the seam allowances and press.
7. Serge the lower edge of the garment, press it to the wrong side, and topstitch.

Congratulations – your t-shirt are finished! :)