

If the pattern has a double line around it, the seam allowances are included.

Note: By default, seam allowances are NOT included (single line) and will need to be added when laying out and cutting details.

Seam Allowance: 1 cm on all seams; hem guidelines are printed on pattern.

Important! Please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need.

Don't forget to take into account pieces to be duplicated or cut on a fold. When sewing the garment, pay attention to notches. They must match up with corresponding pieces.

2628 Wide-Leg Trousers with Turn-Up Cuffs

Recommendations on fabric: thin natural/mixed suiting fabrics.

You will also need: fusible interfacing; 1 zipper; hook and eye; lining; 3 buttons.


CUTTING:

The word, "beam" used on some patterns means "straight of grain". Some pieces will be cut on the fold, this is noted on the pattern piece. Mark all notches and other design features such as darts, pleats etc. from the pattern onto your fabric.

Seam allowances: all seams – 1 cm.

Main fabric:

1. Back half – cut 2
2. Front half – cut 2
3. Cuff – cut 2
4. Button catch (zipper facing) – cut 1
5. Flap of back pocket – cut 2
6. Flap of front pocket – cut 2
7. Pocket bag of the front pocket – cut 2
8. Facing of the back pocket – cut 1
9. Facing of the front pocket – cut 4

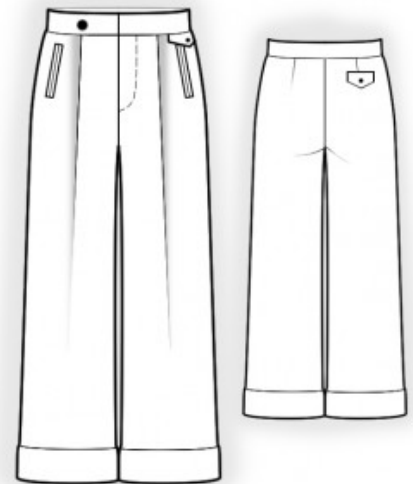

10. Belt – cut 1

Lining:

1. Pocket bag of the front pocket – cut 2
2. Pocket bag of the back pocket – cut 2

Fusible interfacing:

1. Button catch (zipper facing) – cut 1
2. Flap of back pocket – cut 1
3. Flap of front pocket – cut 1
4. Facing of the back pocket – cut 1
5. Facing of the front pocket – cut 4
6. Belt – cut 1

INSTRUCTIONS:

1. Apply fusible interfacing.
2. Mark and sew the darts on the back trouser pieces. Press the dart excess toward the center.
3. Pin the flap pieces together, right sides facing, and sew the side and lower edges. Trim the seam allowances at the corners, turn the flap right side out, shape, and press. Make the buttonholes.
4. Mark the position of the back pocket. Fold the pocket facing in half lengthwise, wrong sides together, and press. Mark an auxiliary stitching line on the pocket facing, parallel to the fold. Mark an additional stitching line on the pocket flap, parallel to its upper edge, making sure the flap width is even throughout. Mark auxiliary lines parallel to the pocket opening for attaching the pocket flap and pocket facing. Sew the pocket lining to the pocket flap. Sew the facing and pocket flap to the back trouser piece. Stop stitching exactly at the pocket guideline markings. Check the stitching from the wrong side to ensure the lines are parallel. Cut the pocket opening and clip diagonally toward the ends of the stitching, stopping 1–1.5 cm from each end. Turn the facing and flap to the wrong side through the opening, shape the edges, and adjust the ends so that the pressed fold of the facing meets the flap. Secure the pocket ends with double backstitching near the corners. Sew the free end of the pocket bag to the seam allowance of the facing seam. Press the pocket bag downward, align the edges, sew, and serge the side edges.
5. Mark the pocket positions on the front trouser pieces. Fold the pocket frames in half lengthwise, wrong sides together, and press. Mark an additional stitching line on each pocket frame so it can be sewn to the front parallel to the fold. Pin the pocket frames to the front trouser piece, place the pocket lining on top, matching the marking lines, and sew. Cut the front piece between the stitch lines. Clip diagonally

toward the ends of the stitching, stopping 1–1.5 cm from each end. Turn the pocket frames and lining to the wrong side through the opening, shape the edges, and adjust the pocket frame ends so the pressed folds meet. Secure the pocket corners with double backstitching from the wrong side. Topstitch the free ends of the facings to the lining. Pin the pocket bag from the main fabric to the pocket lining, matching the edges. Stitch the pocket bag into the seam of the lower pocket frame, folding the main piece out of the way. Sew the outer edges of the pocket bags together and serge.

6. Form the pleats on the front trouser pieces and stitch them along the marked lines. Direct the pleat excess toward the center. Baste the pleats together along the upper edge.
7. Serge the center edges of the back trouser pieces. Sew the center back seam and press the seam allowances open.
8. Trim away the one-piece facing from the left front piece, leaving a 1 cm seam allowance along the center seam. Serge the center front edge and the edge of the zipper facing.
9. Sew the center front seam, starting at the edge of the one-piece facing. Fold the one-piece zipper facing to the wrong side and press. Align the zipper with the center edge of the left front piece and sew it in place. Sew the free zipper tape to the one-piece facing of the right front piece. Sew a decorative topstitch along the marked line on the right front piece, 0.1 cm from the edge. Fold the zipper guard in half lengthwise, wrong sides together, and serge the long edge and lower short edge. Sew the zipper guard to the zipper tape seam on the left front piece. Sew a securing stitch at the end of the closure from the right side of the trousers. Slipstitch the lower edges of the center front facing and button catch together from the wrong side.
10. Sew the side seams. Press the seam allowances toward the back and serge. Sew the inseams. Press the seam allowances toward the back and serge.
11. Serge the lower edge of the waistband. Fold the waistband in half lengthwise, wrong sides together, and press. Pin the front flap above the pocket on the left side. Pin the waistband to the upper edge of the trousers, placing the flap between the waistband and the main piece, and sew. Continue sewing the waistband corners. Trim the corners and turn the waistband right side out. Topstitch the serged edge into the waistband seam.
12. Sew each cuff into a ring and press the seam allowances open. Fold the cuff in half lengthwise, right side out, and press. Pin the cuff to the wrong side of the trousers and sew. Serge the seam allowances and press. Fold the cuff to the right side and sew it to the main piece along the fold by hand with invisible stitches.
13. Sew the hook and eye to the waistband.
14. Sew the buttons according to the buttonholes on the flaps and onto the waistband above the right front pleat.

Congratulations – your trousers are finished! :)