

If the pattern has a double line around it, the seam allowances are included.

Note: By default, seam allowances are NOT included (single line) and will need to be added when laying out and cutting details.

Seam Allowance: 1 cm on all seams; hem guidelines are printed on pattern.

Important! Please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need.

Don't forget to take into account pieces to be duplicated or cut on a fold. When sewing the garment, pay attention to notches. They must match up with corresponding pieces.

2658 Skirt with Pleats and Front Buttons

Recommendations on fabric: natural/mixed fabric suitable for dresses.

You will also need: fusible interfacing; dress zipper; 3 buttons.

CUTTING:

The word, “beam” used on some patterns means “straight of grain”. Some pieces will be cut on the fold, this is noted on the pattern piece. Mark all notches and other design features such as darts, pleats etc. from the pattern onto your fabric.


Seam allowances: all seams – 1 cm. Seam allowance for hem of garment – 1.5 cm.

Main fabric:

1. Back – cut 2
2. Front skirt – cut 1
3. Back facing – cut 2
4. Front facing – cut 1

Fusible interfacing:

1. Back facing – cut 2

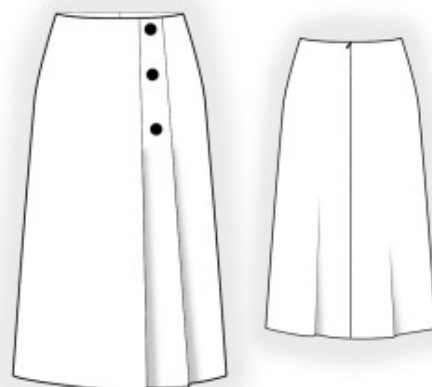

2. Front facing – cut 1

INSTRUCTIONS:

1. Apply fusible interfacing.
2. Serge the center back edges of the skirt separately. Sew the center back seam from the zipper notch to the hem. Press the seam allowances open and insert the zipper.
3. Form and topstitch the pleats on the front skirt according to the markings, directing the pleat excess toward the center.
4. Sew the side seams. Press the seam allowances toward the back and serge.
5. Sew the side seams of the facings and press the seam allowances open. Serge the lower edge. Pin the facing to the skirt, right sides together, and sew the upper edge. Understitch the seam allowances to the facing 0.2 cm from the seam. Turn the facing to the wrong side and press. Slipstitch it to the skirt along the side seams and zipper tape.
6. Serge the lower edge of the skirt, press it to the wrong side, and topstitch.
7. Sew the buttons onto the front skirt.

Congratulations – your skirt are finished! :)