

If the pattern has a double line around it, the seam allowances are included.

Note: By default, seam allowances are NOT included (single line) and will need to be added when laying out and cutting details.

Seam Allowance: 1 cm on all seams; hem guidelines are printed on pattern.

Important! Please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need.

Don't forget to take into account pieces to be duplicated or cut on a fold. When sewing the garment, pay attention to notches. They must match up with corresponding pieces.

2674 High-Waisted Skirt with Flaps

Recommendations on fabric: natural/mixed suiting fabrics.

You will also need: fusible interfacing, dress zipper.

CUTTING:


The word, “beam” used on some patterns means “straight of grain”. Some pieces will be cut on the fold, this is noted on the pattern piece. Mark all notches and other design features such as darts, pleats etc. from the pattern onto your fabric.

Seam allowances: all seams – 1 cm. Seam allowance for hem – 3 cm.

Main fabric:

1. Back – cut 2
2. Right front skirt – cut 1
3. Left front skirt – cut 1
4. Back facing – cut 2
5. Front facing – cut 1
6. Flap – cut 2

Fusible interfacing:

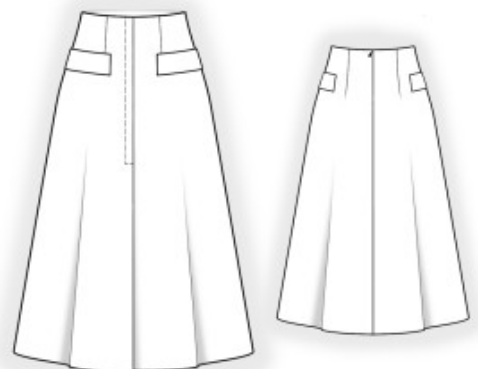

1. Back facing – cut 2
2. Front facing – cut 1
3. Flap – cut 2

INSTRUCTIONS:

1. Apply fusible interfacing.
2. Sew the darts on the back skirt pieces and press the dart excess toward the center.
3. Serge the center back edges separately. Sew the center back seam from the zipper marking to the hem. Press the seam allowances open and insert the zipper.
4. Sew the darts on the front skirt pieces and press the dart excess toward the center.
5. Clip into the seam allowance of the vertical edge of the left front skirt near the marking. Serge both sections: from the upper edge to the notch and from the notch to the lower edge. Press the seam allowance from the notch to the lower edge to the wrong side and topstitch. Serge the vertical edge of the right front skirt. Fold the one-piece placket to the wrong side and press. Place the right front skirt over the left front skirt, matching the center lines, and topstitch according to the markings.
6. Sew the side seams. Press the seam allowances toward the back and serge.
7. Fold each flap in half lengthwise, right sides together, and sew the short edges. Trim the corners, turn the flaps right side out, shape, and press. Serge the upper edge. Pin the flaps to the garment according to the markings, with the serged edge facing downward, and sew. Fold the flaps downward and topstitch along the seam.
8. Sew the side seams of the facings and press the seam allowances open. Serge the lower edge. Pin the facing to the upper edge of the skirt, right sides together, and sew. Clip the seam allowances, turn the facing to the wrong side, and press. Slipstitch it to the side seams and zipper tape.
9. Serge the lower edge of the garment, press it to the wrong side, and finish with blind stitches. Hem the vertical edge of the right front skirt with blind stitches.

Congratulations – your skirt are finished! :)