

If the pattern has a double line around it, the seam allowances are included.

**Note:** By default, seam allowances are NOT included (single line) and will need to be added when laying out and cutting details.

Seam Allowance: 1 cm on all seams; hem guidelines are printed on pattern.

**Important!** Please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need.

Don't forget to take into account pieces to be duplicated or cut on a fold. When sewing the garment, pay attention to notches. They must match up with corresponding pieces.


## 2849 Skirt with diagonal yoke

Recommendations on fabric: natural/mixed fabrics suitable for skirts in contrasting or similar color.

You will also need: fusible interfacing, 1 dress zipper.

### CUTTING:

The word, "beam" used on some patterns means "straight of grain". Some pieces will be cut on the fold, this is noted on the pattern piece. Mark all notches and other design features such as darts, pleats etc. from the pattern onto your fabric.

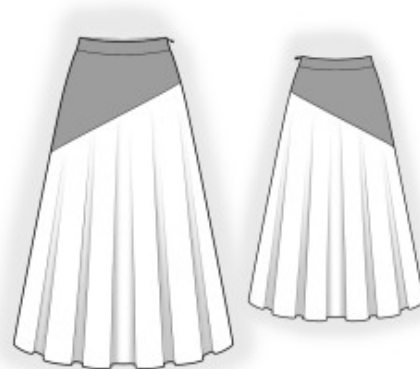

Seam allowances: all seams 1 cm. Seam allowance for hem – 2 cm.

### Main fabric:

1. Back – cut 1
2. Front skirt – cut 1
3. Back facing – cut 2
4. Front facing - cut 2

### Main fabric 1:

1. Lower Front Skirt – cut 1
2. Lower back skirt – cut 1

Fusible interfacing:

1. Back facing – cut 1
2. Front facing - cut 1

INSTRUCTIONS:

1. Apply fusible interfacing.
2. Sew the front facing to the front skirt piece. Press the seam allowances toward the facing. Sew the lower skirt piece to the front skirt piece, press the seam allowances upward, and serge.
3. Sew the back facing to the back skirt piece. Press the seam allowances toward the facing. Sew the lower skirt piece to the back skirt piece, press the seam allowances upward, and serge.
4. Serge the left side seam edges separately. Sew the left side seam from the zipper notch to the hem. Insert the zipper.
5. Sew the right side seam. Press the seam allowances toward the back and serge.
6. Sew the side seams of the inner facings. Press the seam allowances open and serge the lower edge. Pin the facing to the skirt, right sides together, and sew the upper edge. Clip the seam allowances, turn the facing to the wrong side, and press. Sew the side edges of the facing to the zipper tape by hand. Topstitch the facing into the seam of the outer facing.
7. Serge the lower edge of the garment, press it to the wrong side, and topstitch.

Congratulations – your skirt are finished! :)