

If the pattern has a double line around it, the seam allowances are included.

Note: By default, seam allowances are NOT included (single line) and will need to be added when laying out and cutting details.

Seam Allowance: 1 cm on all seams; hem guidelines are printed on pattern.


Important! Please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need.

Don't forget to take into account pieces to be duplicated or cut on a fold. When sewing the garment, pay attention to notches. They must match up with corresponding pieces.

4621 Loose blouse

Recommendations on fabric:
natural or mixed soft suiting
fabric.

You will also need: fusible
interfacing.

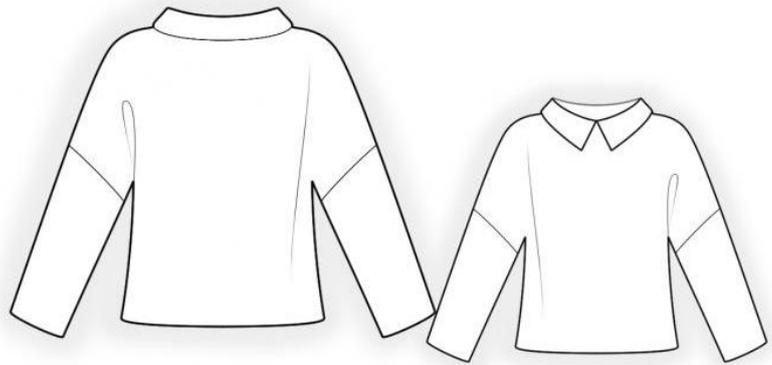

CUTTING:

The word, “beam” used on some patterns means “straight of grain”. Some pieces will be cut on the fold, this is noted on the pattern piece. Mark all notches and other design features such as darts, pleats etc. from the pattern onto your fabric.

Main fabric:

1. Back – cut 1 on fold
2. Front - cut 1 on fold
3. Sleeve - cut 2
4. Collar - cut 1

Fusible interfacing:

1. Collar - cut 1

INSTRUCTIONS:

1. Apply fusible interfacing to collar.
2. Sew shoulder seams, serge and press towards back.
3. Sew sleeves to jumper, serge and press seams towards sleeve.
4. Sew side seam and sleeve seam with one continuous stitch. Serge and press seams towards back.
5. Fold collar in half lengthwise right sides together and sew corners. Start and finish stitch exactly at marked line of collar connection. Trim seams in corners and turn collar right side out. Press. Sew outer collar into neckline. Turn edge of inner collar under and topstitch into connecting seam.
6. Serge lower edge of blouse and sleeves, turn under, press and slipstitch.

Congratulations, your blouse is ready! :)