

If the pattern has a double line around it, the seam allowances are included.

Note: By default, seam allowances are NOT included (single line) and will need to be added when laying out and cutting details.

Seam Allowance: 1 cm on all seams; hem guidelines are printed on pattern.

Important! Please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need.

Don't forget to take into account pieces to be duplicated or cut on a fold. When sewing the garment, pay attention to notches. They must match up with corresponding pieces.

4751 Raglan Sweatshirt with Zippers in the Armholes

Note: *The pattern has no bust darts and is therefore not suitable for larger sizes.*

Recommendations on fabric: natural/mixed knit fabric of small stretchiness.

You will also need: zipper.


CUTTING:

The word, “beam” used on some patterns means “straight of grain”. Some pieces will be cut on the fold, this is noted on the pattern piece. Mark all notches and other design features such as darts, pleats etc. from the pattern onto your fabric.

Seam allowances: all seams 1 cm. Seam allowance on left and right front near pocket opening – 2 cm. Seam allowance along hem of back, hem of front and hem of sleeve – 2 cm.

Main fabric:

1. Back – cut 1 on fold
2. Front right – cut 1
3. Front left – cut 1
4. Back sleeve – cut 2
5. Front sleeve – cut 2
6. Stand collar – cut 2

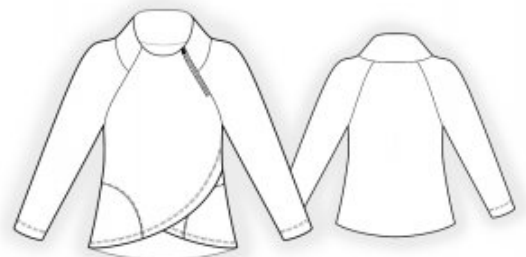

7. Pocket bag – cut 2

INSTRUCTIONS:

Advice: sew knit pieces with special elastic/zig-zag stitches. If you use an overlock, cut seam allowances to 0.6-0.8 cm width. Topstitch hem allowances with double needle to save elasticity.

1. Serge side and inner edges of pocket bag. Clip into seam allowances near notches of side seam on left and right front. Press seam allowance of pocket opening twice at 1 cm and topstitch. Pin front onto pocket bag and topstitch along the marked line.
2. Serge lower edges of fronts, press onto wrong side and topstitch. Pin right side of right front to wrong side of left front and sew the neckline. Clip seam allowances, turn pieces right side out, baste together along raw edges, and treat as one piece in the future.
3. Sew Back Sleeve to Back, press seams towards back and serge.
4. Sew upper edges of sleeves, press seams towards back and serge.
5. Sew outer stand collar into neckline, press seam allowances towards stand collar.
6. Sew right front sleeve to front, press towards front and serge. Sew left front sleeve to front from notch to side seam, clip into seam allowance near the notch, press apart and serge. Sew in zipper.
7. Sew side seams, sewing the sleeve edges at the same time, press seams towards back and serge.
8. Serge lower edge of inner stand collar. Pin inner stand collar to outer stand collar right sides together and sew side edges and upper edge. Trim away corners, turn stand collar right side out, press. Stitch-in-the-ditch the inner stand collar into the seam between outer stand collar and garment.
9. Serge hem of sleeve, press onto wrong side and topstitch. Serge lower edge of garment, press onto wrong side and topstitch.

Congratulations – your sweatshirt are finished! :)