

If the pattern has a double line around it, the seam allowances are included.

Note: By default, seam allowances are NOT included (single line) and will need to be added when laying out and cutting details.

Seam Allowance: 1 cm on all seams; hem guidelines are printed on pattern.

Important! Please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need.

Don't forget to take into account pieces to be duplicated or cut on a fold. When sewing the garment, pay attention to notches. They must match up with corresponding pieces.

4755 Skirt with decorative wrap

Recommendations on fabric: thin natural/mixed suiting fabrics.

You will also need: fusible interfacing, dress zipper, decorative buckle.

CUTTING:

The word, "beam" used on some patterns means "straight of grain". Some pieces will be cut on the fold, this is noted on the pattern piece. Mark all notches and other design features such as darts, pleats etc. from the pattern onto your fabric.


Seam allowances: all seams 1 cm. Seam allowance along center and lower edge of skirt – 1.5 cm. Seam allowance for hem of garment – 1.5 cm.

Main fabric:

1. Back – cut 1 on fold
2. Front skirt – cut 1 on fold
3. Fly piece – cut 1
4. Back facing – cut 1
5. Front facing – cut 1
6. Fly piece facing – cut 1

Fusible interfacing:

1. Back facing – cut 1
2. Front facing – cut 1

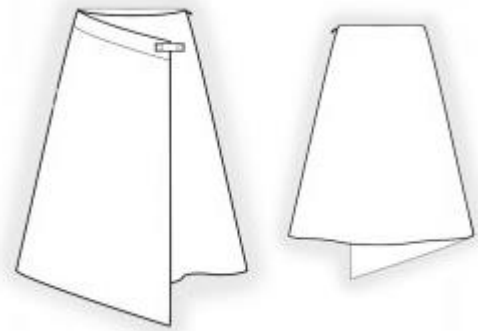

INSTRUCTIONS:

1. Apply fusible interfacing to facings.
2. Press lower seam allowance of fly piece facing onto wrong side. Pin facing to self-piece right side to wrong side and sew. Fold facing onto right side and topstitch at fly piece along the fold.
3. Serge center and lower edges of fly piece, press onto wrong side and topstitch. Pin fly piece at front skirt, baste together alongside edge.
4. Serge separately left side edges. Sew left side seam from notch for zipper to bottom, press seam apart, pressing the slit for zipper at the same time. Sew in zipper. Sew right side seam, press seam allowances towards back and serge.
5. Sew right side seam on facings, press seam apart. Serge lower edge. Pin facing to skirt right sides together and sew upper edge. Topstitch seam allowances onto facing at 0,2 cm from the seam. Fold facings onto wrong side, press. Sew seam allowances to zipper tape.
6. Serge lower edge of skirt, press onto wrong side and topstitch.
7. Sew on decorative buckle.

Congratulations, your skirt is ready! :)