

If the pattern has a double line around it, the seam allowances are included.

Note: By default, seam allowances are NOT included (single line) and will need to be added when laying out and cutting details.

Seam Allowance: 1 cm on all seams; hem guidelines are printed on pattern.

Important! Please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need.


Don't forget to take into account pieces to be duplicated or cut on a fold. When sewing the garment, pay attention to notches. They must match up with corresponding pieces.

4811 Sweatshirt with Large Collar

Recommendations on fabric: natural/mixed knit fabric of small stretchiness.

CUTTING:

The word, "beam" used on some patterns means "straight of grain". Some pieces will be cut on the fold, this is noted on the pattern piece. Mark all notches and other design features such as darts, pleats etc. from the pattern onto your fabric.

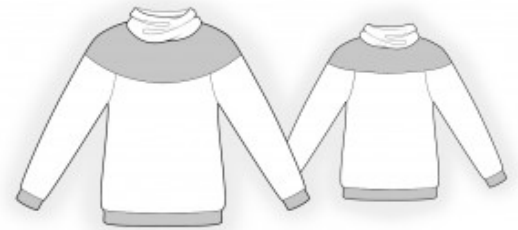

Seam allowances: all seams 1 cm.

Main fabric:

1. Back – cut 1 on fold
2. Front – cut 1 on fold
3. Collar – cut 1
4. Sleeve – cut 2

Main fabric 1:

1. Back yoke – cut 1 on fold
2. Front yoke – cut 1 on fold
3. Cuff – cut 2
4. Lower placket – cut 1 on fold

INSTRUCTIONS:

1. Sew shoulder seams on yokes. Serge seams and press toward the back.
2. Sew side seams. Serge seams and press toward the back.
3. Sew sleeve seam. Serge and press toward the back. Sew lower sleeve to front and back. Serge seam allowances.
4. Sew yoke to blouson body. Serge seams and press upward.
5. Sew cuff into a ring, press seam open. Fold cuff in half lengthwise, right side out, and press. Sew cuff to lower edge of sleeve, stretching to fit the required length. Press upward and serge.
6. Sew lower placket into a ring, press seam open. Fold placket in half lengthwise, right side out, and press. Sew placket to lower edge, stretching to fit the required length. Press upward and serge.
7. Sew collar into a ring, press seam open. Fold collar in half lengthwise, right side out, and press. Sew collar to neckline, offsetting collar seam 2 cm toward the back from the shoulder seam. Serge seam allowances.

Congratulations – your sweatshirt are finished! :)