

If the pattern has a double line around it, the seam allowances are included.

Note: By default, seam allowances are NOT included (single line) and will need to be added when laying out and cutting details.

Seam Allowance: 1 cm on all seams; hem guidelines are printed on pattern.

Important! Please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need.

Don't forget to take into account pieces to be duplicated or cut on a fold. When sewing the garment, pay attention to notches. They must match up with corresponding pieces.


4876 Blouse with flounce collar

Recommendations on fabric: thick natural/mixed fabrics suitable for blouses.

CUTTING:

The word, "beam" used on some patterns means "straight of grain". Some pieces will be cut on the fold, this is noted on the pattern piece. Mark all notches

and other design features such as darts, pleats etc. from the pattern onto your fabric.

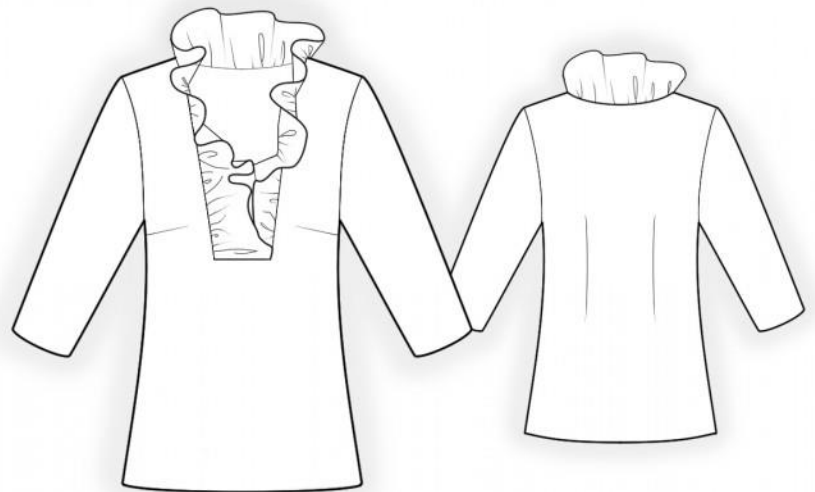

Main fabric:

1. Front – cut 1 on fold
2. Back – cut 1 on fold
3. Collar – cut 1
4. Sleeve – cut 2

INSTRUCTIONS:

1. Sew front darts (if drafted for the size measurements provided). Press bulk towards top.
2. Sew darts on back. Press bulk towards center.

3. Sew shoulder seams, press seams towards back and serge.
4. Collar pin together in half lengthwise right side out. Sew a gathering stitch along longer edge and gather fullness. Pin left collar onto right collar and baste together along lower edge. Sew collar into neckline, slashing corners, press towards garment and serge. Topstitch seam allowances onto Shell at 0.5 cm.
5. Sew sleeves into armholes, matching notches, serge and press. Sew sleeve seams and continue sewing side seams, serge and press.
6. Serge lower edge of garment and lower edge of sleeve, press onto wrong side and topstitch.

Congratulations, your blouse is ready! :)