

If the pattern has a double line around it, the seam allowances are included.

**Note:** By default, seam allowances are NOT included (single line) and will need to be added when laying out and cutting details.

Seam Allowance: 1 cm on all seams; hem guidelines are printed on pattern.

**Important!** Please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need.

Don't forget to take into account pieces to be duplicated or cut on a fold. When sewing the garment, pay attention to notches. They must match up with corresponding pieces.


## 5038 Flared trousers

Recommendations on fabric: soft well-draped fabric.

You will also need: zipper (length depends on your size); 1 button.

### CUTTING:

The word, "beam" used on some patterns means "straight of grain". Some pieces will be cut on the fold, this is noted on the pattern piece. Mark all notches and other design features such as darts, pleats etc. from the pattern onto your fabric.

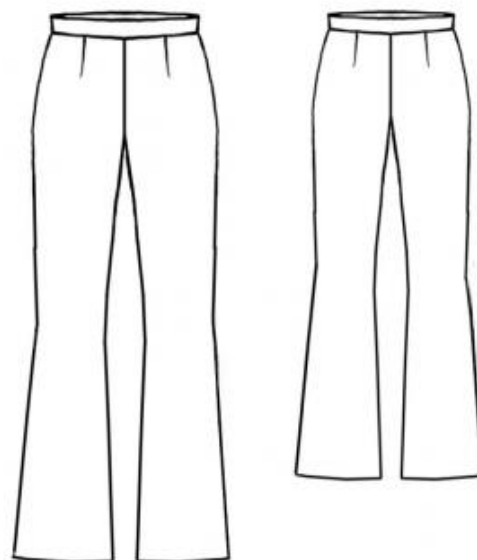

Seam allowances: all seams 1 cm.

### Main fabric:

1. Front part – 2 details
2. Back part – 2 details
3. Waistband – 1 detail

### INSTRUCTIONS:

1. Stitch the darts and press the dart excess toward the center.
2. Stitch the side seams, leaving an unstitched section in the upper left seam. Stitch the inseams and press the seam allowances open. Stitch the center front and center back

seams in one continuous seam. Press the seam allowances open from the top to the curves.

3. Press the slit seam allowances to the wrong side. Stitch the zipper under the slit edges.
4. Fold the waistband along the center and stitch the short ends. Place the outer waistband on the garment, right sides together, and stitch it to the upper edge of the trousers. Fold the inner waistband under and sew it to the joining seam. Sew on the hooks.
5. Fold the hems to the wrong side and stitch.

Congratulations – your trousers are finished! :)