

If the pattern has a double line around it, the seam allowances are included.

Note: By default, seam allowances are NOT included (single line) and will need to be added when laying out and cutting details.

Seam Allowance: 1 cm on all seams; hem guidelines are printed on pattern.

Important! Please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need.

Don't forget to take into account pieces to be duplicated or cut on a fold. When sewing the garment, pay attention to notches. They must match up with corresponding pieces.

5435 Silk trousers with rib

Recommendations on fabric: Solid fabric, possibly silk, approx. 1.4 meters (size 32-42), approx. 2 meters (size 44-54) with a fabric width of 150 cm.

You will also need: Jersey coupons for waistband and cuffs, elastic of 3 cm wide.


CUTTING:

The word, "beam" used on some patterns means "straight of grain". Some pieces will be cut on the fold, this is noted on the pattern piece. Mark all notches and other design features such as darts, pleats etc. from the pattern onto your fabric.

Seam allowances: 1 cm for all seams.

Main fabric:

1. Front part – 2 pieces
2. Back part – 2 pieces
3. Waistband
4. Cuffs – 2 pieces

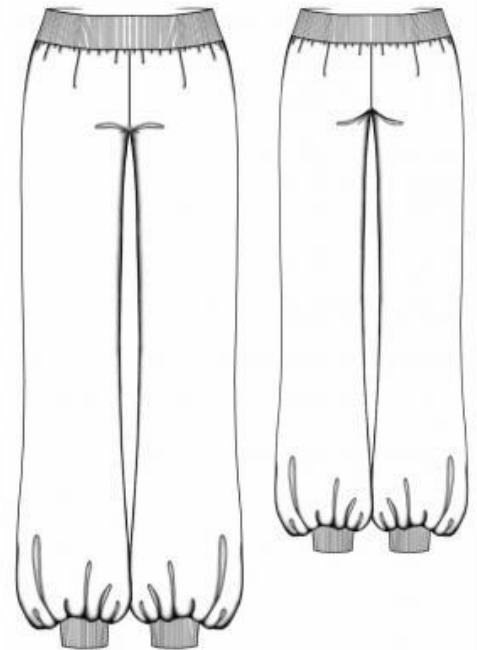

INSTRUCTIONS:

1. Sew the side edges and neaten them. Press side seams backwards.
2. Sew inside leg seam and neaten it. Press inside leg seams backwards.
3. Sew the front edge and middle edge. Neaten front seam and middle sea. Make another seam along the crotch aloes to joining seam of front seam and middle seam.
4. Sew cuffs side edges in a ring, then neaten them. Sew cuffs to garment lower edges, gathering hems and stretching cuffs. Neaten joining seam.
5. Cut elastic braid according to your girths. Sew the side edges of elastic braid. Sew waistband side edges, then neaten them. Sew elastic braid to the lower edge of jersey waistband.
6. Coincide waistband side edges and garment side seams, gathering garment upper edge and stretching waistband lower edge. Remove tacking. Sew elastic braid to the waistband. Neaten joining seam.

Congratulations, your trousers is ready! :)