

If the pattern has a double line around it, the seam allowances are included.

Note: By default, seam allowances are NOT included (single line) and will need to be added when laying out and cutting details.

Seam Allowance: 1 cm on all seams; hem guidelines are printed on pattern.

Important! Please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need.

Don't forget to take into account pieces to be duplicated or cut on a fold. When sewing the garment, pay attention to notches. They must match up with corresponding pieces.

5601 Jumpsuit for pregnant women

Recommendations on fabric: denim.

You will also need: fusible interfacing, 2 buttons, 2 clasps, elastic braid of 3 cm width.

CUTTING:

The word, "beam" used on some patterns means "straight of grain". Some pieces will be cut on the fold, this is noted on the pattern piece. Mark all notches and other design features such as darts, pleats etc. from the pattern onto your fabric.


Seam Allowance: 1 cm for all seams, 3 cm for hem allowance, 2 cm for pocket's upper edges.

Main fabric:

1. Back piece - 2 pieces
2. Front piece - 2 pieces
3. Bib - 2 pieces
4. Back pocket - 2 pieces
5. Shoulder strap - 2 pieces
6. Side insert - 2 pieces

Lining:

1. Bib - 2 pieces

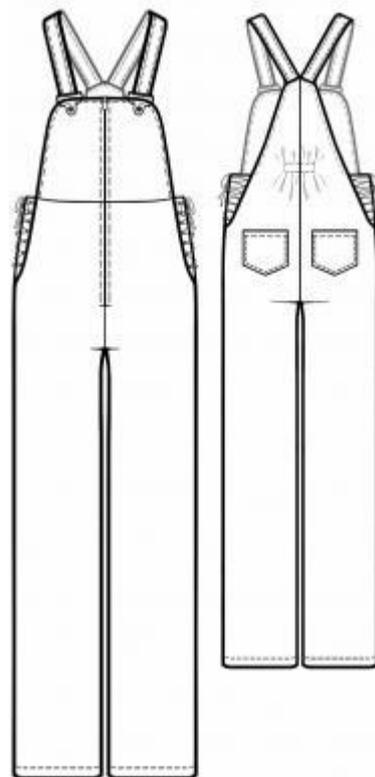

2. Upper back - 2 pieces
3. Closure facing - 2 pieces

Fusible interfacing: Closure facing - 2 pieces

INSTRUCTIONS:

1. Fuse interfacing on the wrong side of matching fabric parts.
2. Overlock edges of back pocket. Fold, press and stitch hems at opening edges of back pockets. Turn seam allowances on pocket edges to wrong side and press. Pin and topstitch pockets to pants back piece as marked on pattern.
3. Overlock the top edge of the side insert, turn it to wrong side and stitch.
4. Stitch side and leg inseams, overlock seam allowances and press apart.
5. Cut the cord into 4 cm long pieces. Make loops from cord pieces and sew to side edges of front and back pieces as marked on pattern.
6. Stitch side inserts into side edges of front and back pieces, overlock seam allowances.
7. Stitch center inseam of pants from back piece to notch of zipper in front piece. Overlock the seam allowances and press.
8. Stitch bib and front piece together avoiding side insert coming into seam.
9. Overlock the bottom edge of the bib lining. Overlock the outside and bottom edges of the closure facing. Sew closure facing to bottom edge of bib lining. Place lining and bib together right sides together and stitch side edges and top edge. Clip seam allowances diagonally at corners.
10. Stitch the zipper in the center seam of the front piece and the bib. Place the lining of the bib and the closure facing to the center edge right sides together and sew along the zipper. Turn the bib and lining, straighten the edges and press. Topstitch along the zipper 0.5 cm from the seam.
11. Fold each shoulder straps in half lengthwise right sides together and stitch the long and one of the short edges. Turn shoulder straps out, straighten, press, and topstitch 0,5 cm from edge. Pin the diagonal edges of the shoulder straps to the top edge of the back piece as marked on pattern.

12. Overlock the bottom edge of the back piece lining. Place lining and back piece right sides together and stitch side and top edges. Cut seam allowances diagonally at corners. Turn lining, straighten edges and press.
13. Topstitch along edges of bib and top of back piece.
14. Stitch two parallel seams on the back piece as marked on the pattern, pull the elastic into the resulting drawstring, and fix the edges of the elastic. Fix the bottom edge of the lining of the back piece to the center seam.
15. Overlock the bottom seam allowances, turn them to the wrong side and stitch. Sew buttons to the top edge of the bib. Attach clasps to shoulder straps. Pull the cord through the loops in the sides and bind them.

Congratulations, your jumpsuit is ready! :)