

If the pattern has a double line around it, the seam allowances are included.

**Note:** By default, seam allowances are NOT included (single line) and will need to be added when laying out and cutting details.

Seam Allowance: 1 cm on all seams; hem guidelines are printed on pattern.

**Important!** Please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need.

Don't forget to take into account pieces to be duplicated or cut on a fold. When sewing the garment, pay attention to notches. They must match up with corresponding pieces.


## 5634 Top with open shoulders

Recommendations on fabric: knitwear (middle stretchable).

You will also need: decorative braid for coulisse

### CUTTING:

The word, "beam" used on some patterns means "straight of grain". Some pieces will be cut on the fold, this is noted on the pattern piece. Mark all notches and other design features such as darts, pleats etc. from the pattern onto your fabric.

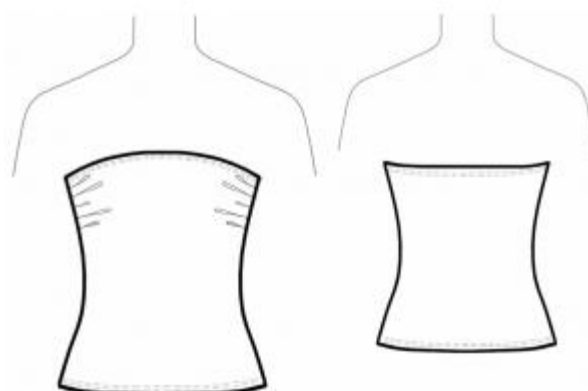

Seam allowance: 1.5 cm for lower edge, 1 cm for other seams

### Main fabric:

1. Back part – 1 piece
2. Front part – 1 piece

### INSTRUCTIONS:

**Advice:** stitch jersey details with special elastic/zig-zag stitches. If you use an overlock, cut seam allowances till 0.6-0.8 cm width. Topstitch hem allowances with double needle to save elasticity.

1. Mark and make pleats on front part. Fix ends of pleats with the stitch at 0.5 cm from the

side edge.

2. Sew side edges of the top. Neaten side seams, press them to back part.

3. Neaten lower and upper edges of the top, turn them to wrong side, press and topstitch.

Congratulations, your top is ready! :)