

If the pattern has a double line around it, the seam allowances are included.

Note: By default, seam allowances are NOT included (single line) and will need to be added when laying out and cutting details.

Seam Allowance: 1 cm on all seams; hem guidelines are printed on pattern.

Important! Please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need.


Don't forget to take into account pieces to be duplicated or cut on a fold. When sewing the garment, pay attention to notches. They must match up with corresponding pieces.

5659 Top with open back

Recommendations on fabric: Recommendations on fabric: (natural or mixed) medium to high stretch-knit jersey

CUTTING:

The word, "beam" used on some patterns means "straight of grain". Some pieces will be cut on the fold, this is noted on the pattern piece. Mark all notches and other design features such as darts, pleats etc. from the pattern onto your fabric.

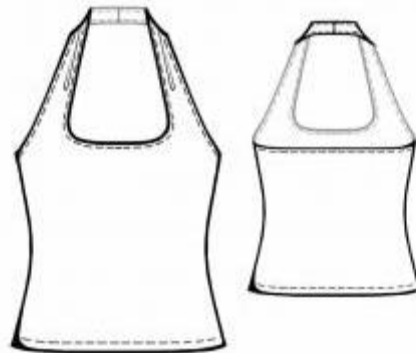

Seam allowance: 1.5 cm for the hem, 1 cm for other seams

Main fabric:

1. Back – cut 1
2. Front – cut 1

INSTRUCTIONS:

Advice:

Knit fabric pieces are sewn together with special stretch-stitch or narrow zig-zag stitch. Seam allowance on hem is stitched with twin needles to save stretchiness. Pieces can also be sewn together with 3 or 4 – thread serger. When serging, cut seam allowances to 0.6 – 0.8 cm.

1. Sew side seams. Serge and press seam toward back.
2. Sew front straps together. Serge seam and press.
3. Serge all raw edges, turn onto wrong side, and topstitch.

Congratulations, your top is ready! :)