

If the pattern has a double line around it, the seam allowances are included.

Note: By default, seam allowances are NOT included (single line) and will need to be added when laying out and cutting details.

Seam Allowance: 1 cm on all seams; hem guidelines are printed on pattern.


Important! Please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need.

Don't forget to take into account pieces to be duplicated or cut on a fold. When sewing the garment, pay attention to notches. They must match up with corresponding pieces.

6129 Flat cap

Recommendations on fabric: cotton, wool, heavy-weight silk or whipcord.

You will also need: fusible interfacing, lining, elastic.

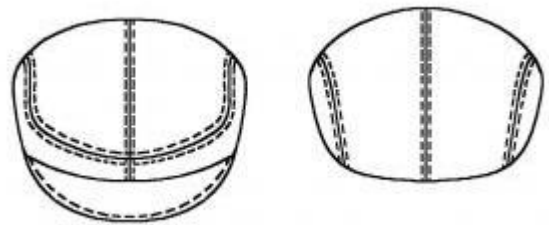

CUTTING:

The word, "beam" used on some patterns means "straight of grain". Some pieces will be cut on the fold, this is noted on the pattern piece. Mark all notches and other design features such as darts, pleats etc. from the pattern onto your fabric.

Seam allowances: all seams – 1.0 cm.

Main fabric:


1. Peak – cut 2 (A)
2. Side – cut 2 (B)
3. Bottom – cut 2 (C)

Lining:

1. Side – cut 2 (B)
2. Bottom – cut 2 (C)

Fusible interfacing:

1. Peak – cut 2 (A)

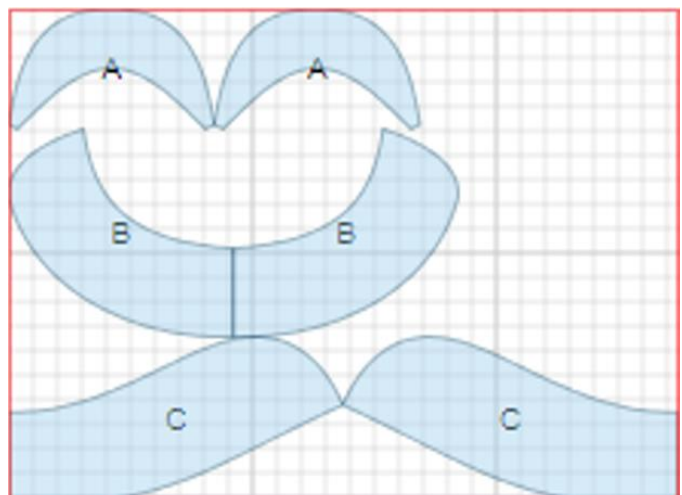

INSTRUCTIONS:

1. Place bottom pieces with right sides together. Sew the center seam, press open and make stitches along the seam.
2. Sew side pieces with right sides together, press the seam open and make stitches along the seam.
3. Place bottom and side pieces right sides together. Sew, press seams open, and make stitches along seams.
4. Apply fusible interfacing to peak pieces. Place pieces right sides together and sew the outer edge. Snip seam. Turn the peak piece right side out, baste out and press. Topstitch along the outer edge.
5. Place peak and cap right sides together matching center notches and sew.
6. Turn the lower edge of cap under and press. Attach elastic on back of the head between bottom and side pieces connecting seams. Attach ends of elastic to seams.
7. Sew lining pieces together. Set lining into the cap matching seams. Turn the lower edge of lining under and topstitch connecting cap and lining pieces. Make another decorative stitch over the elastic on back of head.

Congratulations, your cap is ready! :)