

If the pattern has a double line around it, the seam allowances are included.

Note: By default, seam allowances are NOT included (single line) and will need to be added when laying out and cutting details.

Seam Allowance: 1 cm on all seams; hem guidelines are printed on pattern.

Important! Please print all the paper patterns and lay them out at the width of fabric you plan to use (usually from 90 to 150 cm) to see how much fabric you will need.

Don't forget to take into account pieces to be duplicated or cut on a fold. When sewing the garment, pay attention to notches. They must match up with corresponding pieces.

7094 Hat made of water-repellent fabric with fur

ATTENTION! In the construction of the pattern, is used rz_48 – the girth of the head. Measure through the most prominent point of the occipital protuberance and the centers of the frontal protuberances. The tape should connect at the front.

Recommendations on fabric: water repellent fabrics, overcoat fabrics, faux fur.

You will also need: lining, synthetic winterize, fusible interfacing, buttons.


CUTTING:

Main fabric:

1. Middle part – 2 pieces
2. Side part – 2 pieces
3. Visor – 1 piece
4. Back plate – 1 piece
5. Eyelet – 2 pieces
6. Strap – 2 pieces

Fur:

1. Visor – 1 piece
2. Back plate – 1 piece
3. Eyelet – 2 pieces

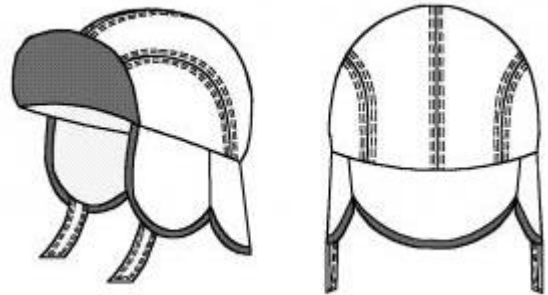

Lining fabric:

1. Middle part – 2 pieces
2. Side part – 2 pieces

Sintepon:

1. Middle part – 2 pieces
2. Side part – 2 pieces

Fusible interfacing:

1. Visor – 1 piece
2. Back plate – 1 piece
3. Eyelet – 2 pieces

INSTRUCTIONS:

1. Apply fusible interfacing to the fabric parts of the visor, butt pad and lugs.
2. Fold the middle parts right side in, stitch, topstitch the seam. Sew the side parts to the middle part, topstitch the seams.
3. Fold the straps right side in and overstitch. Cut off excess fabric in the corners, turn the straps to the front side, straighten, iron. Place two finishing stitches along the edges of the straps.
4. Press the edges of the visor, butt-pad, and fabric lugs on the wrong side. Sew on the fabric lugs in the middle of the fastening straps. Fold over the corresponding parts of the visor, the back of the head and the ears of fur and fabric with the right side inward and sew with overlock stitches, slightly setting down the parts of the fur, especially in the rounded areas. The edges and midpoints of fur and fabric parts must match.
5. Turn out the visor, butt-cap, and ears to the front side. Sweep, making sure that the fur evenly bends around the fabric and the edging of the fur is the same in width. The details must be symmetrical. Join the details of the visor, back plate, and ears with frequent stitches over the edge.
6. Fold the head with a visor, butt-pad, and ears with the right side inward and grind, evenly distributing the fit along the entire length of the head or placing it only in front under the visor. Bend the details of the visor, butt pad and ears down and stitch at 0.4–0.5 cm from the seam.
7. Fold the details of the lining and padding polyester and quilt with parallel lines forming

rhombuses. The distance between the lines is 2 cm. Stitch the lining details in the same way as for the top. Top off the seams.

8. Insert the lining into the hat so that it fits snugly against the top, pin in several places, fold over the edge of the lining and sew with frequent blind stitches.

9. Bend the visor up and attach it to the head, slightly pulling the thread. Try on the hat on your head, determine the location of the buttons, punch through the buttons.

Congratulations, the hat is ready!